


Saving Autopilot Configuration.

If you are using the FM1000 on a Trimble Autopilot system or in an Accuguide Ready Tractor, the settings on the Navigation Controller need to be Saved and Restored separate to the main FM1000 Modules.

If the Navigation Controller is being moved from one vehicle to another it is important to save the configuration to avoid the need to fully calibrate the Navigation when it is returned to the current vehicle.

| | |
|--|---|
| | <ul style="list-style-type: none"> • Select 'Setting' on the top Right of the screen.  |
| | <ul style="list-style-type: none"> • Select 'Autopilot' in the list on the left. • Select 'Setup'. <p>NOTE: If this button is locked you will be prompted for the <u>Administration Password – 2009.</u></p> |
| | <ul style="list-style-type: none"> • Select 'Edit' at the bottom of the page. |

- Select '**Save Vehicle**' at the bottom of the page to save the Configuration.

If the Autopilot configuration has been saved previously, the previous name(s) will be listed under '**Configuration**'.


- A previously saved configuration can be updated by selecting it from the list and selecting '**OK**'.
- Clicking in the '**Filename**' field will open a keyboard allowing you to name the Autopilot Configuration.

The *Default Name* contains the *date* and *time* of when the configuration is saved.


It is recommended to give the Autopilot Configuration a meaningful name such as **305Magnum**

- Select '**OK**' to **save** the **configuration**.

Boekeman Machinery FM1000 Essentials

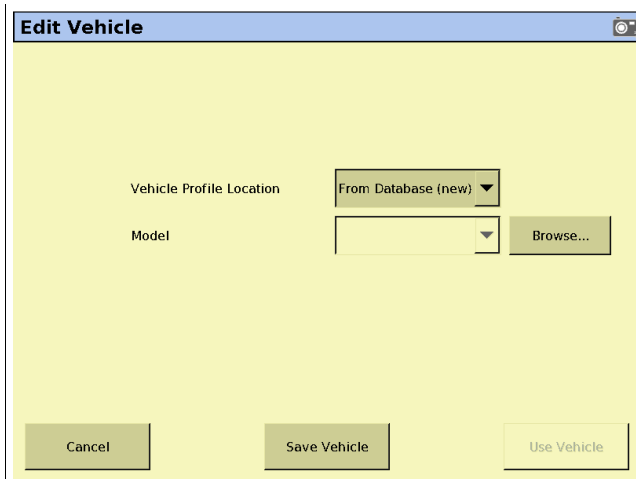

- You will return to the **'Edit Vehicle'** page.
- Press the **'Cancel'** button.

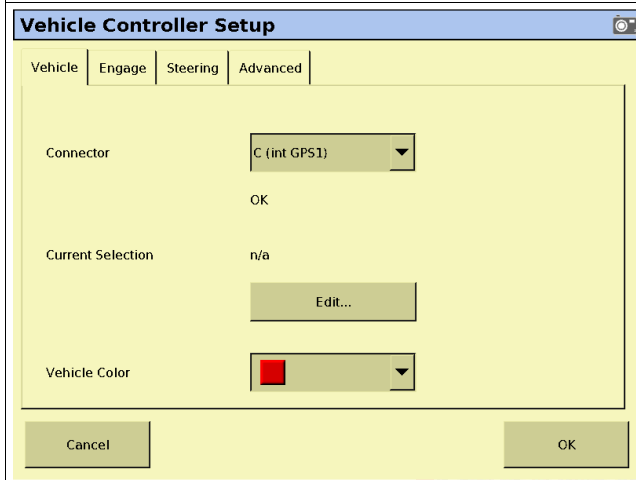

- Select **'OK'** to return to the **Home Screen**.

Please Note:

This procedure will save the Autopilot Configuration to the FM1000 memory. To ensure that the settings are backed up please refer to the section **Download to USB**.