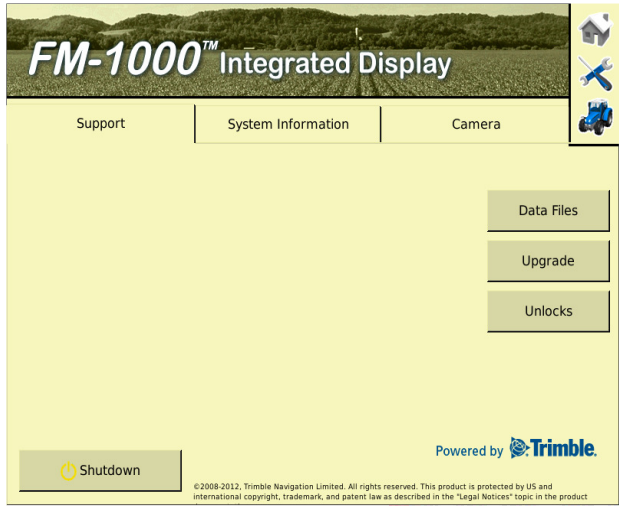
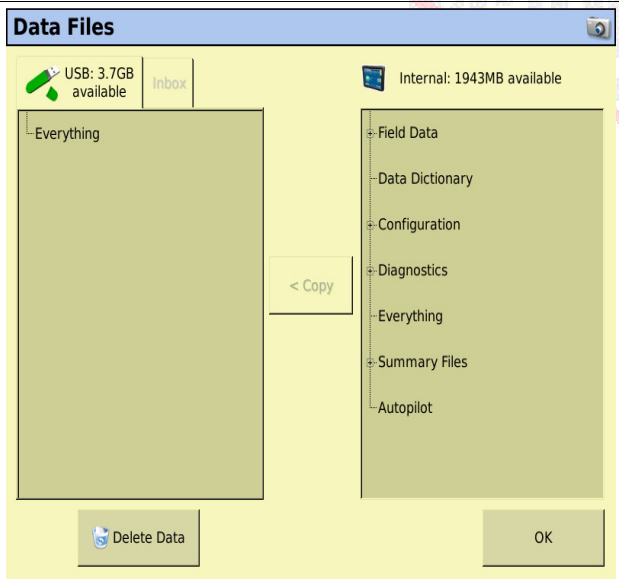



Data Files – Deleting Coverage Logging, Configuration, Fields etc.

You may want to delete the **coverage logging** on your FM1000 to free up space which will help ensure the ongoing reliability of the FM1000 as well as reduce the time required for Downloading Paddock Information.

NOTE:

If you are using the recorded information for mapping etc, make sure that you have downloaded the Paddocks before deleting the coverage.

	<ul style="list-style-type: none">• Select 'Data Files' on the Home Screen.
	<ul style="list-style-type: none">• Select 'Delete Data' at the bottom left of the screen. <p>NOTE: If this button is locked you will be prompted for the <u>Administration Password – 2009</u>.</p> <p>This button doesn't show the Locked symbol. If the Administration password has been entered previously you will not be prompted for it.</p>

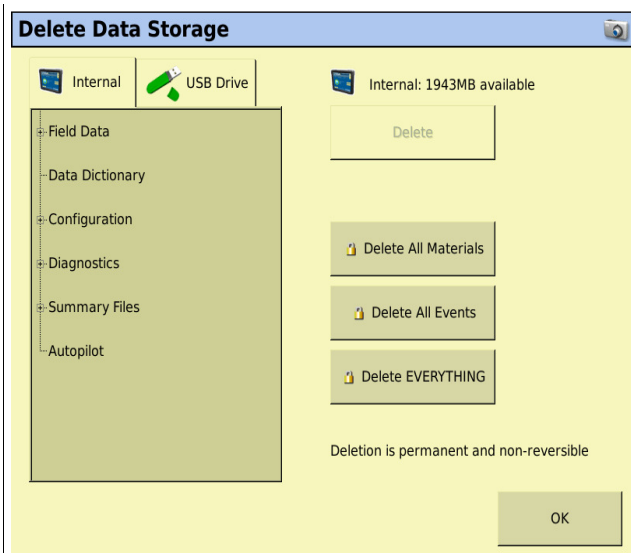


- Select desired location that you wish to delete data i.e. 'Field', 'Configuration' etc.
- Select '**Delete All Events**'.

This will delete all events [Coverage] on the FM1000.

All Paddock names and A-B Lines will remain on the FM1000.

CAUTION:


The '**Delete All Events**' and '**Delete Everything**' Buttons are close together. Make sure that you press the correct button.

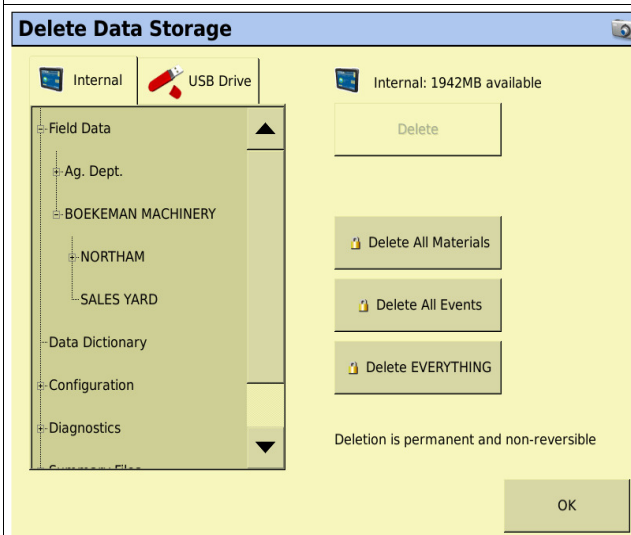

- Select '**Field Data**' [+]
- Select '**Client**' [+]
- Select '**Farm**' [+]
- Select '**Field**' [+]
- Select '**Delete All Events**'.

Make sure that you **read** this **WARNING** screen carefully to make sure that **you didn't accidentally** press the **Delete Everything** Button.

- Press the **Yes** Button on this warning screen to '**delete all events**'.

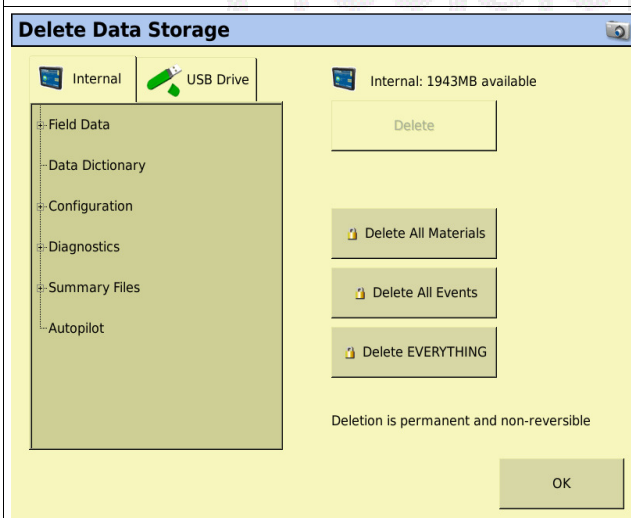


To Delete Client, Farm Field, Configuration etc.

- Select '**Configuration**' [+]
- Highlight in Blue **desired** configuration to be **deleted**.
- Select '**Delete**' on Top Right Hand Side of screen.
- Select '**OK**'.

This will return you to the '**Data Files**' Transfer screen.

Boekeman Machinery FM1000 Essentials

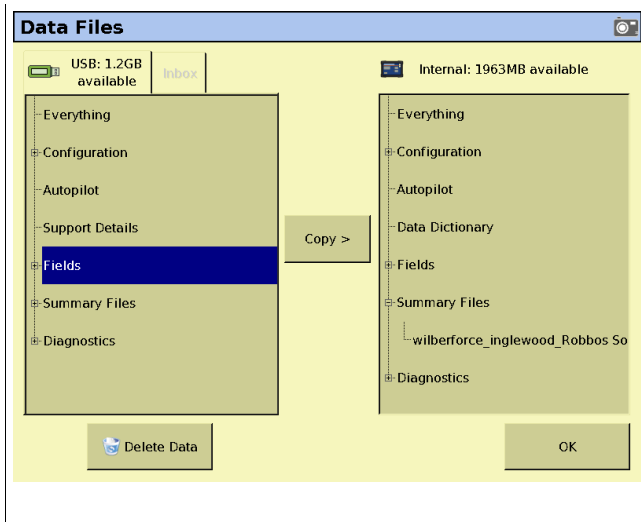

- Select '**OK**' again to return to the **Home Screen**.

